


Multistage (Cascade) Series

## Mechanical Characteristics

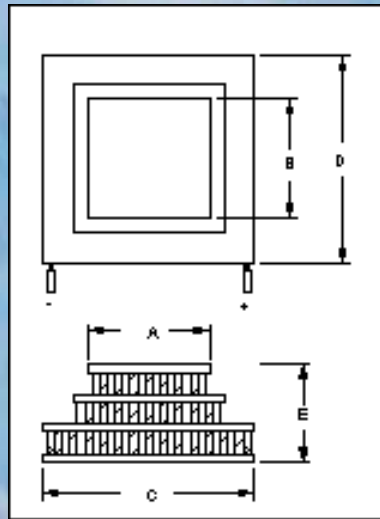

## Multistage (Cascade) Series Specifications

Catalog Number <sup>1</sup>	I <sub>max</sub> (Amps)	T <sub>H</sub> = 25°C			Dimensions (mm)				
		Q <sub>max</sub> <sup>2</sup> (Watts)	V <sub>max</sub> (Volts)	DT <sub>max</sub> (°C)	A	B	C	D	E <sup>3</sup>
2 OT 1.4-10-F9	1.45	0.42	0.84	86	3.2	3.2	3.9	3.9	3.8
2 OT 1.4-24-F9	1.40	1.03	1.96	83	4.1	4.1	6.1	6.1	4.2
2 OT 0.6-83-F9	0.65	1.19	7.96	92	4.9	4.9	9.8	9.8	4.2
2 CP 040 080-7-2	2.0	0.41	0.8	91	3.5	3.5	8	8	7.4
2 CP 040 065-31-17	2.1	3.11	3.8	81	11.5	11.5	15	15	6.6
2 CP 055 065-31-17	4.0	6.04	3.8	81	15	15	20	20	7.2
2 CP 085 100-31-20	5.9	9.74	3.8	77	23	26	30	30	10.7
2 CP 055 065-71-31	4.3	12.65	8.6	85	20	20	30	30	7.2
2 SC 040 050-127-63	2.8	16.05	15.5	83	30	30	30	30	6.5

2 CP 085 065-71-31	10.3	30.22	8.6	85	30	30	44	44	8.9
2 SC 055 045-127-63	6	34.51	15.5	83	40	40	40	40	7.5
2 SC 085 065-127-70	9.5	59.25	15.5	81	62	62	62	62	8.9
3 OT 1.3-26-F9	1.33	0.3	1.94	110	2.5	2.5	6.6	6.6	5.2
3 OT 1.3-46-F9	1.30	0.6	3.40	109	4.1	4.4	8.8	8.8	5.8
3 CP 040 065-31-17-7	1.8	1.52	3.8	96	8	8	15	15	9.5
3 CP 040 065-127-71-31	1.8	6.48	15.4	96	15	15	30	30	9.5
3 CP 055 065-71-31-17	3.5	6.53	7.7	97	15	15	30	30	10.4
3 CP 055 065-127-71-31	3.5	12.58	15.4	96	20	20	40	40	10.4
3 CP 085 065-71-31-17	8.4	15.6	7.7	97	22	22	44	44	12.9
4 CP 040 080-31-17-7-2	1.5	0.47	3.8	114	3.5	3.5	15	15	14
4 CP 040 080-64-26-11-6	1.4	1.08	6.8	110	4	11	16	23.6	14
4 CP 040 065-71-31-17-7	1.7	1.66	7.9	110	8	8	23	23	12.5
4 CP 055 065-69-29-11-6	3.4	2.68	7.5	112	4.5	14.5	24	33	13.8
4 CP 040 080-127-71-31-17	1.3	2.87	14.6	107	11.5	11.5	30	30	14
4 CP 055 065-127-71-31-17	3.1	6.84	14.6	107	15	15	40	40	13.8
5 CP 040 065-127-71-31-17-7	1.6	1.74	14.5	118	8	8	30	30	15.4
5 CP 055 065-127-71-31-17-7	3	3.37	14.5	118	10	10	40	40	16.9
6 CP 040 065-127-71-31-17-7-2	1.5	0.63	14.5	131	3.5	3.5	30	30	18.3
6 CP 055 065-127-71-31-17-7-2	3	1.22	14.5	131	5	5	40	40	20.1

