
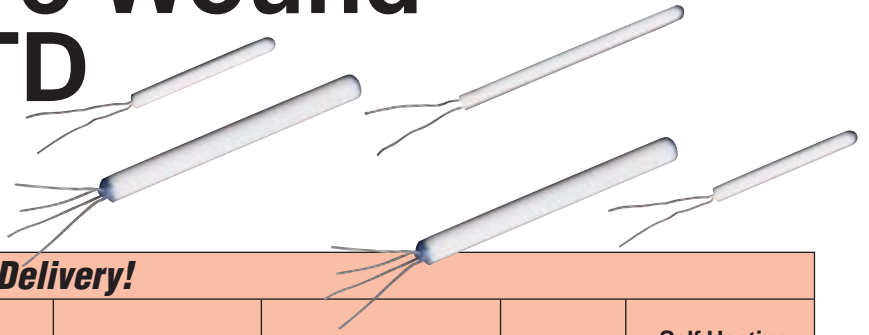












Ceramic Wire Wound Platinum RTD Elements




All Styles In Stock For Immediate Delivery!

Dimensions in millimeters (1 mm = .03937")	Nominal Resistance Ohms	Temperature Range, °C (°F)	Model Number	Price	Self Heating Error in °C/mW Flowing Air V = 1m/sec
	1 x 100	-200 to 600 (-330 to 1110)	1PT100KN815	\$12	0.28
	1 x 100	-200 to 600 (-330 to 1110)	1PT100KN1510	13	0.14
	1 x 100	-200 to 850 (-330 to 1560)	1PT100K2515	19	0.08
	1 x 100	-200 to 600 (-330 to 1110)	1PT100KN2510	12	0.07
	1 x 100	-200 to 600 (-330 to 1110)	1PT100KN3026	19	0.04
	1 x 100	-200 to 600 (-330 to 1110)	1PT100KN1515	12	0.08
	1 x 100	-200 to 600 (-330 to 1110)	1PT100KN3045	19	0.01
	1 x 100	-200 to 600 (-330 to 1110)	1PT100KN2515	12	0.07
	2 x 100	-200 to 850 (-330 to 1560)	*2PT100K2517	42	0.06
	2 x 100	-200 to 600 (-330 to 1110)	*2PT100KN3045	38	0.01
	2 x 100	-200 to 600 (-330 to 1110)	*2PT100KN3026	36	0.04

*Dual elements. All RTD elements come standard with 10 mm bare leads. Welded insulated extension leads available. Pricing is dependent on lead style, See page with "RTD Elements with Lead Wires Attached" (page C-12).

Discount Schedule

1 to 4 units	Net
5 to 10 units	4%
11 to 24 units	6%
25 to 49 units	10%
50 to 99 units	11%
100 units and up	13%

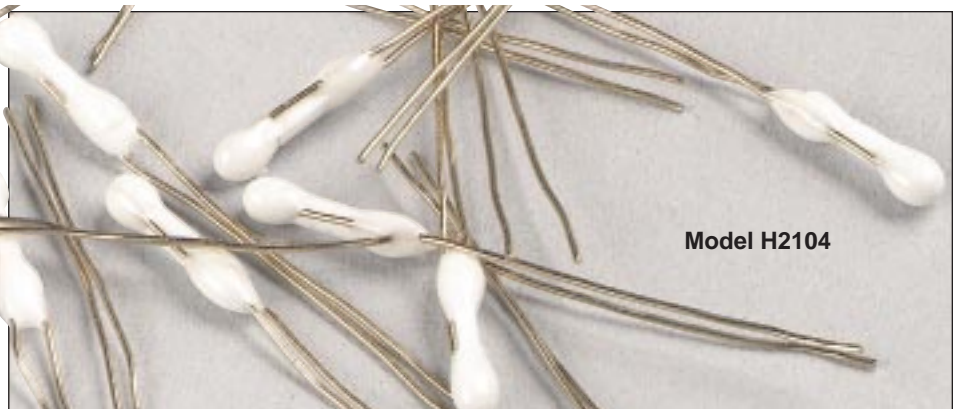

Model H2104